



I-TRONIK

XSD-1402-52 Dry Cabinet



Outstanding performance

The XSD series has an outstanding performance for drying moisture sensitive components and pcb's.

The dynamic drying unit of the 5000 series reaches very reliable low humidity values of 0,5% RH and automatically regenerates if necessary.

As a result of an insulated double metal sandwich construction a precise temperature of 60°C can be reached with a very low power consumption.

A radial fan and heater supports the drying process and realizes an equable temperature and moisture level in the cabinet. The relevant process data is obtained by use of an accurate Rotronic sensor.



I-TRONIK S.R.L. - Macchine e prodotti per l'industria elettronica
Via dell'Artigianato, 20 - 35010 - Peraga di Vigonza (PD)
Tel. +39.049.895.2300 - Fax +39.049.893.4822 - P.IVA 01443020282
commerciale@itronik.it _ www.itronik.it



Totech Europe BV
De Linge 28
NL-8253 PJ Dronten
www.totech.eu.com

Phone: +31 (0) 321 330239
Fax: +31 (0) 321 330254
K.v.K: Lelystad 390 86417
E-Mail: info@totech.eu.com

V.A.T.: NL813341887B01
IBAN: NL83Rabo0145683443
B.I.C./Swift: RaboNL2U
Bank: 1456.83.443



Features

- **User friendly handling**
- **ESD features**
- **Insulation**
- **Data logging**
- **Online read out**
- **Interior lighting**
- **Door & humidity alarm buzzer**
- **Leveling out**
- **Lockable doors**
- **Sliding shelves**
- **U 5000 series drying unit**
- **Rotronic sensor**
- **Power supply**
- Display with easy menu structure
- Norm (IEC 61340-5-1)
ESD stainless steel body (10^3 Ohm/sq).
Conductive glazing (in- and outside $10^3</math> Ohm/sq).$
- 60 mm sandwich construction with Polyurethane
- Integrated data logger over Sensor with standard 2000 measuring points (optional software is required).
- RS 232 interface for data (optional software is required).
- Low power consumption LED lighting
- Longer dooropenings are detected, high RH levels are detected
- Adjustable legs
- Every door can be locked separately with a key.
- In height adjustable sliding shelves (5 pcs)
- <math>< 0.5\%</math> RH, made in Germany
- Precision sensor, accuracy $\pm 0.8\%$ RH, $\pm 0.3^\circ\text{C}$
- Power cord 5 meter with IEC plug

Benefits

- **Drying time (see reference table)**
- **Recovery time after door opening**
- **Temperature stability**
- **Temperature setting**
- **Energy saving consumption**
- **Network**
- **IPC**
- **European Quality**
- **Maintenance**
- Fast drying time, Level 3 component, $< 1.4\text{ mm} = 18\text{ hours}$ ($60^\circ\text{C} / 1\% \text{ RH}$)
- $< 6\text{ minutes}$
- The same temperature level throughout the drying cabinet as a result of the use of a radial fan in combination with ventilation and heating canal in an insulated sandwich construction. Accuracy $\pm 2\%$
- Heating up to 60°C
- As a result of a Dynamic dry unit, sandwich construction with insulating Polyurethane.
- Optional
- According to IPC-Jstd 033C
- Made in Germany
- Easy to service, low maintenance



Technical Data Cabinet

- External dimensions: (W x H x D) 1432 x 1930/2110 x 808 mm
- Internal dimensions: (W x H x D) 1315 x 1504 x 600 mm
- Weight: 230 kg
- Weight on shelf: 50 kg
- Shelves (WxD): 10 pcs, 535 x 550 mm.
- Volume: 1190 L
- Electric supply: 230 VAC (120 VAC optional)
- Power consumption: 500 W/h (60° C)
- Protection class: Class 1, hard grounded
- Humidity level cabinet: <0,5 % RH can be reached with drying unit U 5002
- Sensor accuracy: +/- 0,8 % RH, +/- 0,3°C
- Temperature accuracy: 60° C, +/- 2° C

Technical Data 52 Display

Settings:

- Language Menu
- Nominal Value Humidity
- Nominal Value Humidity Alarm
- Delay Humidity Alarm (in combination with heater)
- Nominal Value Temperature (in combination with heater)
- Temperature Alarm (in combination with heater)
- Delay Temperature Alarm
- Doors Alarm
- Interlocking
- Manual Regeneration



Display:

- Supply voltage (supplied by drying unit) 24 VAC/DC
- Input 4 function keys (tactile-touch keys)
- Display 61 x 33 mm, white, controllable backlight, adjustable contrast
- SUB-D plug ("universal" 9-wire standard serial cable)
- Power consumption at 24 VDC, 40 mA



Technical Data Rotronic Sensor HC2-S



Based on the Airchip 3000 Technology use the HygroClip 2 probes can be used for control of temperature and humidity.

The HygroClip 2 probes can be configured with the ROTRONIC HW4 software and share the following features:


- Measurement of relative humidity and temperature.
- Data recording of up to 2000 relative humidity and temperature value pairs.
- Programmable automatic sensor test with fail safe mode and sensor drift compensation.

Technical Data dry-unit U 5000 series

- Dehumidifying performance: 120 g/h max.
- Minimal humidity 0,2% RH
- Dehumidifying Temperature 10 – 60° C
- External compression: 8 Pa
- Electric supply: 230 VAC (120 VAC available)
- Dimensions (L x B x H): 487 x 487 x 150 mm
- Weight: 14 kg



Performance test

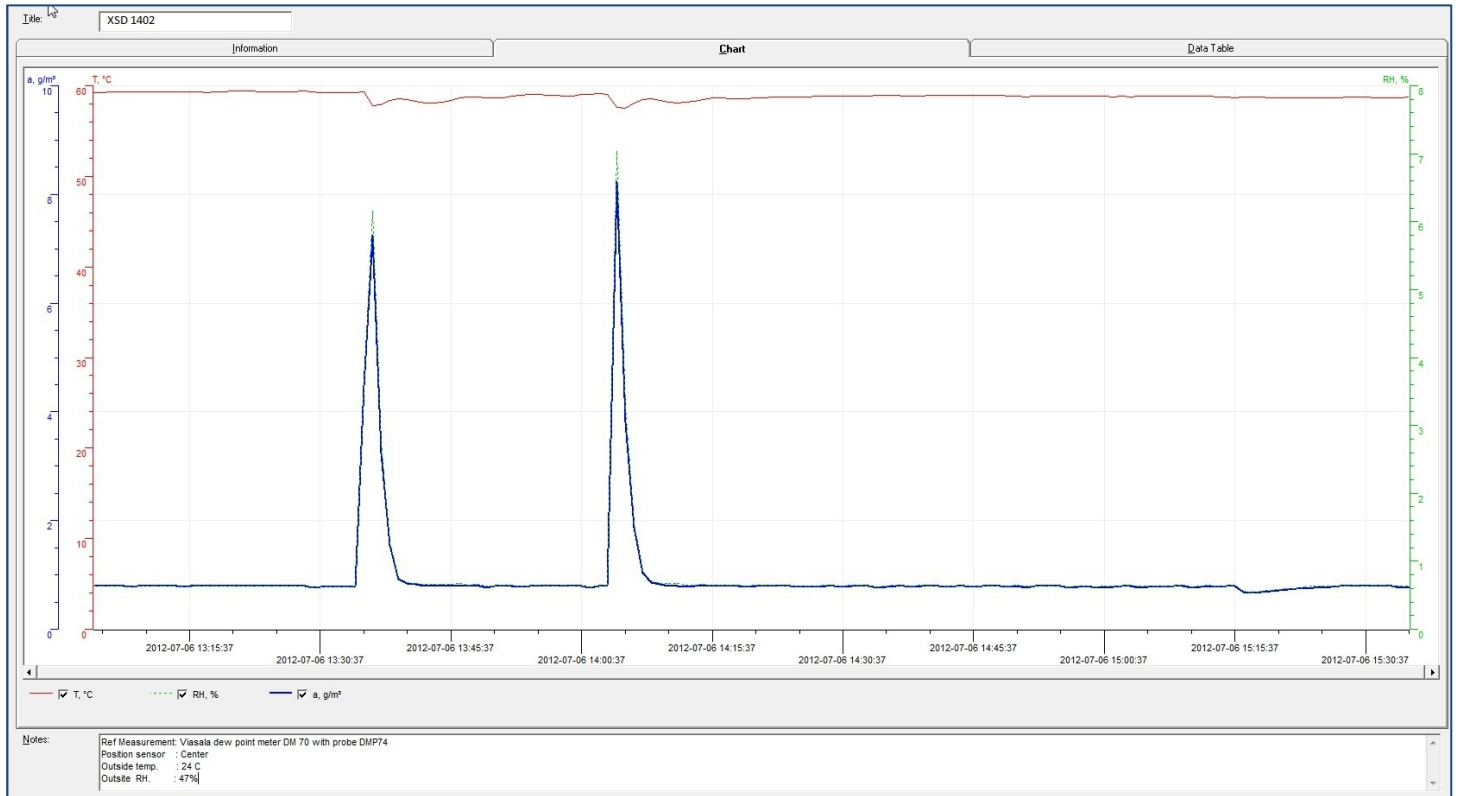

Test conditions




Instrument:
 Type of dew point sensor:
 Accuracy of dew point sensor:
 Location of sensor:
 Ambient conditions:
 Dooropenings:

Vaisala.
 Vaisala drycap 180M
 $\pm 0,2^{\circ} \text{C}$ at $+ 20^{\circ} \text{C}$ ($+ 68^{\circ} \text{F}$)
 In the direct surrounding of cabinet sensor
 Humidity $50 \pm 5\% \text{ rH}$, $25^{\circ} \pm 2^{\circ} \text{C}$, Pressure $994 \pm 20 \text{ hPa}$.
 2 dooropenings, 15 sec. (average RH 0,70%)



Technical Drawings

XSD-1402-52

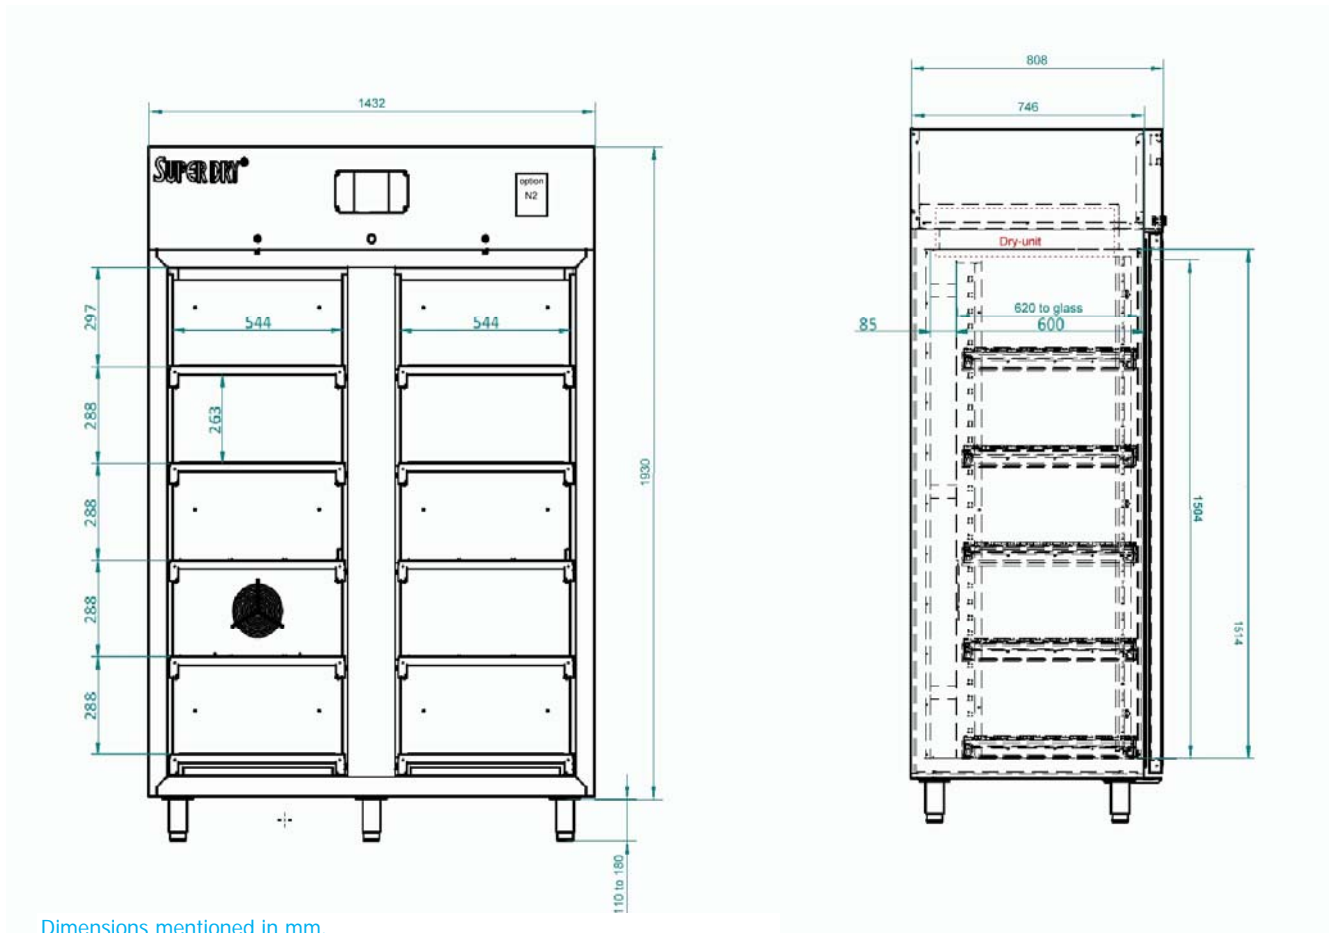

Dimensions mentioned in mm.


Number of different types of shelves that can be mounted in cabinet

Number of shelves (47000141) L/R compartment	5	6	7	8	9	10	11	12	13	14	15
Distance (in mm) between shelves if equally divided	260	210	165	165	115	115	70	70	70	70	70
Remaining space between top shelf and top cabinet	235	190	235	40	235	90	430	330	235	140	40



Number of drawers	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Remaining space in mm	1366	1270	1174	1078	982	886	790	694	598	502	406	310	214	118	22




Technical Drawings

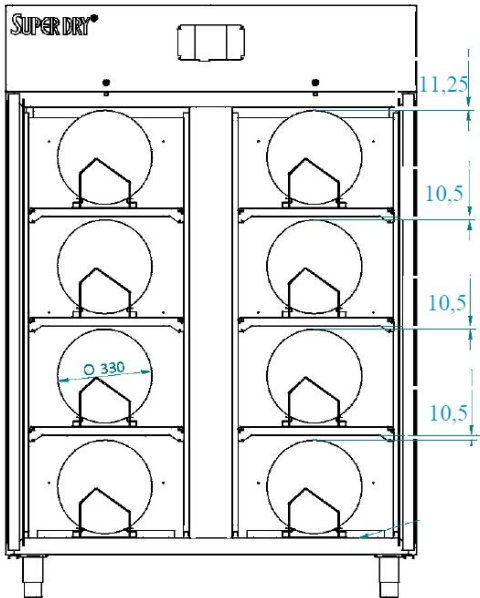


Reel rack formation, 38 reels of 8mm can be placed in 1 reel rack, totally 304 reels.

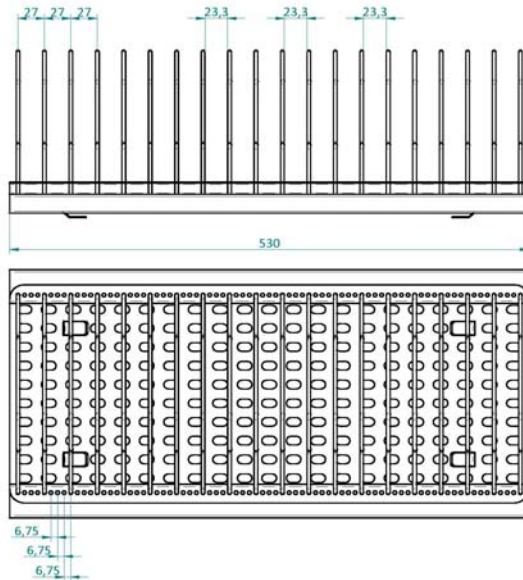

Reel rack 20014005





Short strip


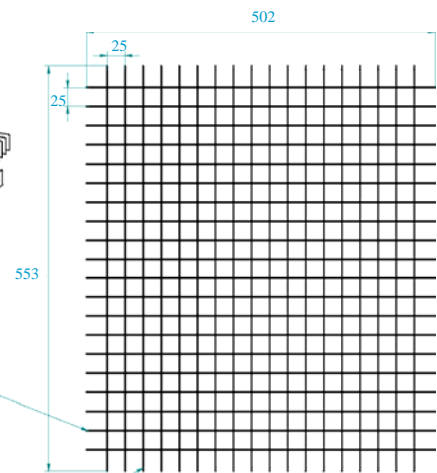


Long strip


Drawer divider system

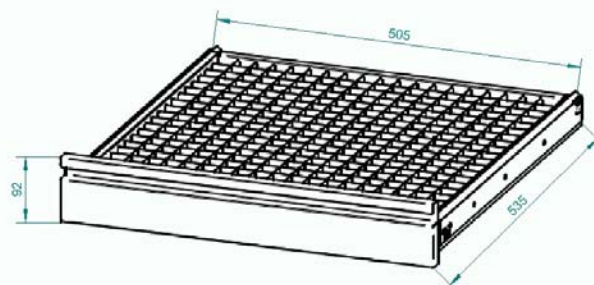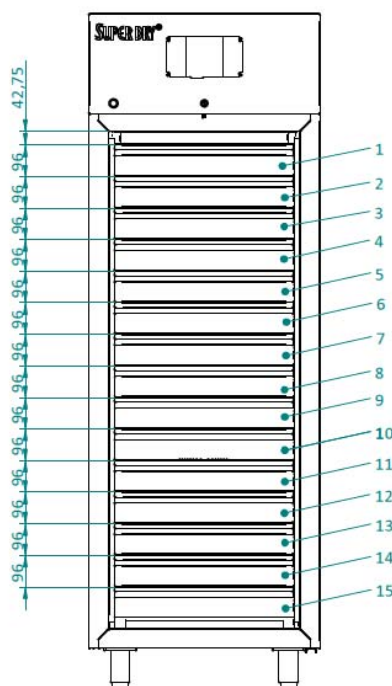


Technical Drawings

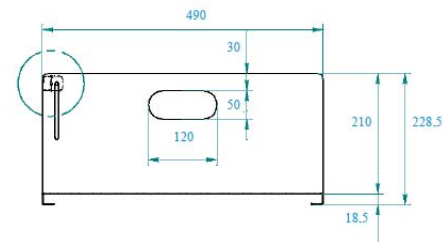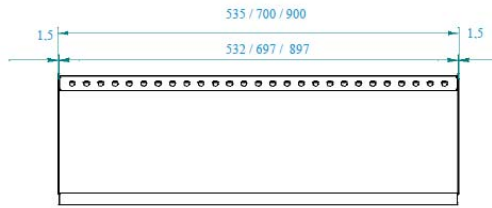


Shelves formation

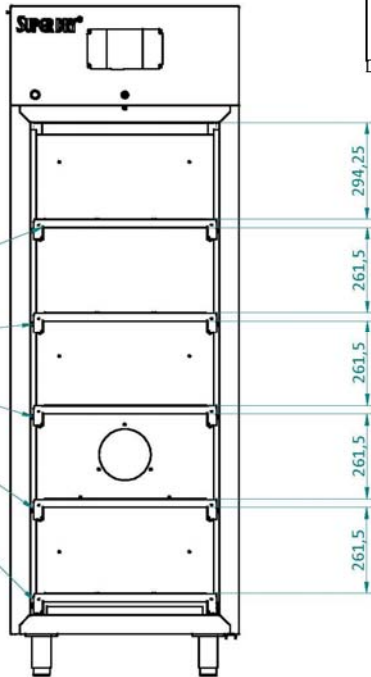


Nr. 5 shelves

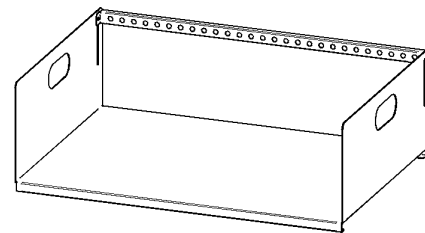


Different Feeder racks possible

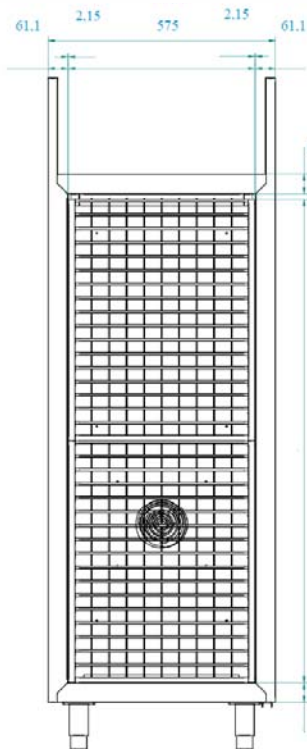

Honeycomb systems

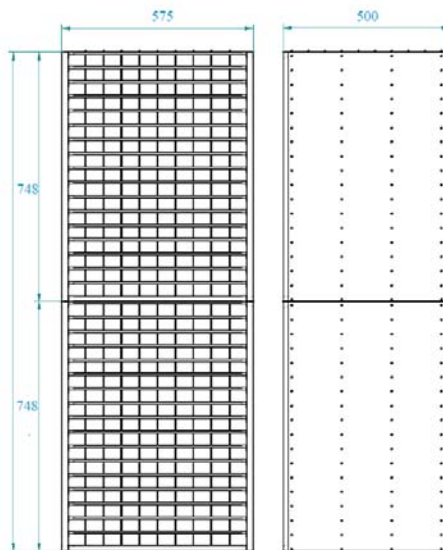

2 pieces of honeycomb system

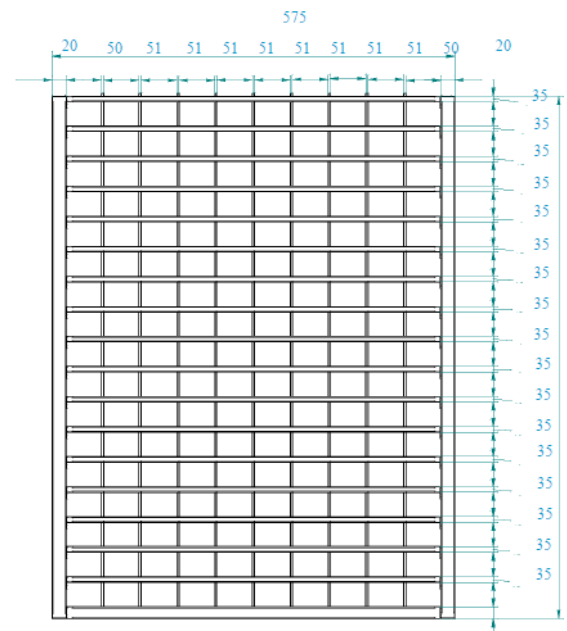

1 piece of honeycomb system




Options



SMD Reel rack with reel supports,

L x W = 530 x 265 mm incl 18 reel supports;


Item number 20014005



Reel support,

additional reel supports for 20014005:

Item number 20014201



Door release pedal,

These foot pedals enables you to open the doors keeping your hands free,


Item number 47000146



Humidity alarm signal Lamp,

two-color, (orange/green or red/green), magnetically fixed, providing optical signals on operational states and exceeded limit values. Operates on 24 V.

Item number orange/green 20016030 .




N2 auto flow system,

The Auto-Flow-System is developed to use in combination with a Totech drying cabinet. The apparatus is used for the quick removal of moisture in the cabinet after the doors has been opened. The drying process is realized by using nitrogen (N²), which is added automatically after the doors have been closed. (by means of adjustable timer function).

Item number 22613000.



Options



N2 flow system,

The Flow-System is developed to use in combination with a Totech drying cabinet. The apparatus is used for adding nitrogen (N²).

Item number 20010020



Additional Sliding Shelves,

stainless steel sliding shelf, (without rollers)

Item number 47000136



Additional Sliding Shelves,

stainless steel sliding shelf on metal rollers, 100% extractable

Item number 47000141



Drawer,

stainless steel drawer

Item number 47000127



Divider system drawer,

Stainless steel divider system which enables you to create compartments with a minimum measurement of $\pm 2,5 \times 2,5$ cm or a multiple of 2,5 cm. A standard set contains 5 long strips (553 mm) and 5 short strips (502 mm).

Item number 47000129



Cover plate for XSD shelves,

prevent small items to fall through

Item number 47000132



Options



Honeycomb system,

Flexible stainless steel storage system for IC Tubes components & PCB's. The width of the compartments is adjustable before installing the system in the cabinet. The number of compartments varies from 17 till 170. In total 4 systems can be Installed in a cabinet.

Item number 20050100



X Feeder System,

This feeder rack is suitable for Siemens X Feeder systems. Sold in combination with reel rack

Item number:46204004



S Feeder System,

This feeder rack is suitable for Siemens S Feeder systems. Sold in combination with reek rack

Item number:46204009



HygroClip 2,

Probe with maximum accuracy for all climate measurements

Item number 470000027

Exchange calibrated sensor:

Item number 47000040



Humidity calibrator Hygropalm 22,

precision measuring device for calibrating sensors

Set including Hygroclip sensor, case and cable:

Item number 20001019

Hygropalm only:

Item number 20001016



Options



MSL Basic software,

Software solution for the monitoring of moisture sensitive components and their MSL States during storage and processing in the production. With the software the exact drying state individually for each component is monitored and displayed. Here, a complete history for each component is traceable up to the full processing. The evaluation of the drying conditions is based on the requirements of the IPC / JEDEC J-STD-033B1 directive.

Item number 200174500



MSL advanced software,

Upgrade to monitor moisture sensitive components and your MSL were to an another storage facility (dry cabinet) with the standard-MSL-software.

Item number 200174502



HW4-E software,

Standard edition for use with 1 cabinet . Rotronic HW4 is a process oriented, validated software for use with the Rotronic line of digital humidity-temperature instruments.

Item number 47000034



HW4-P software, Professional Edition for use with several cabinets. Rotronic HW4 is a process oriented, validated software for use with the Rotronic line of digital humidity-temperature instruments.

Item number 47000031



Rotronic datalogger set,

Including Software HW4-E-V3 and Cable AC3006

Item number 47000580

I-TRONIK S.R.L. - Macchine e prodotti per l'industria elettronica
Via dell'Artigianato, 20 - 35010 - Peraga di Vigonza (PD)
Tel. +39.049.895.2300 - Fax +39.049.893.4822 - P.IVA 01443020282
commerciale@itronik.it _ www.itronik.it

Totech Europe BV
De Linge 28
NL-8253 PJ Dronten
www.totech.eu.com

Phone: +31 (0) 321 330239
Fax: +31 (0) 321 330254
K.v.K: Lelystad 390 86417
E-Mail: info@totech.eu.com

V.A.T.: NL813341887B01
IBAN:NL83Rabo0145683443
B.I.C./Swift: RaboNL2U
Bank: 1456.83.443

